


INSTRUMENT APPROACH CHART

RJAA / NARITA INTL


ILS Y or LOC RWY16R (CAT II & III)

TOKYO APP 124.4 – 127.7 120.2 – 225.65	ILS-LOC 111.5 IKF 332.9 ILS-GP 332.9 ILS-DME CH-52X	NARITA TOWER 118.2-122.7-126.2 236.8-121.95G	RADAR AVBL ATIS 128.25
--	--	--	---------------------------

Simultaneous approach authorized with RWY16L

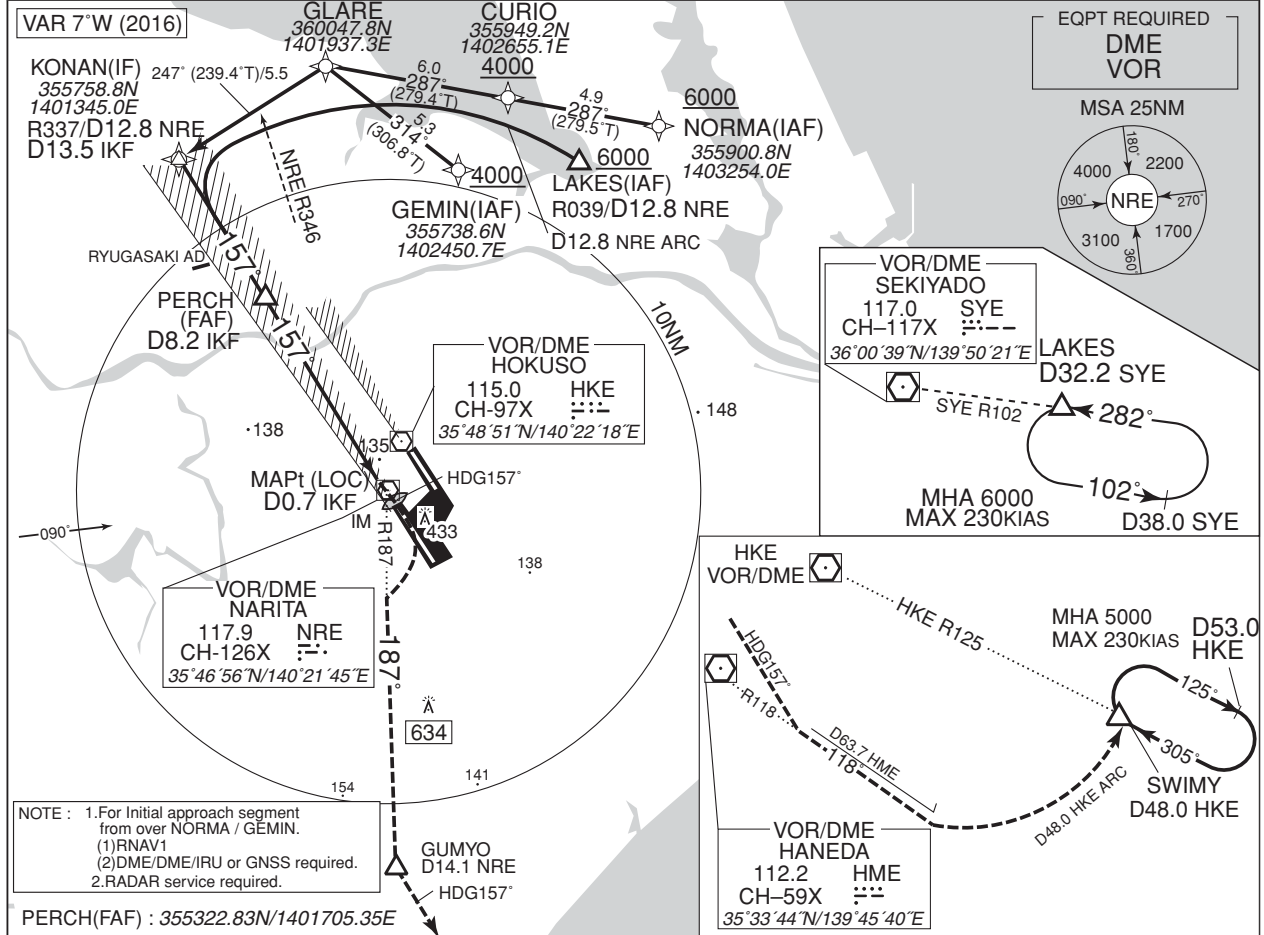

NM to IKF	MAPt	2	3	4	5	6	7	8	FAF
ALT (3.0° APCH Path)	-	757	1075	1394	1712	2031	2349	2668	2731

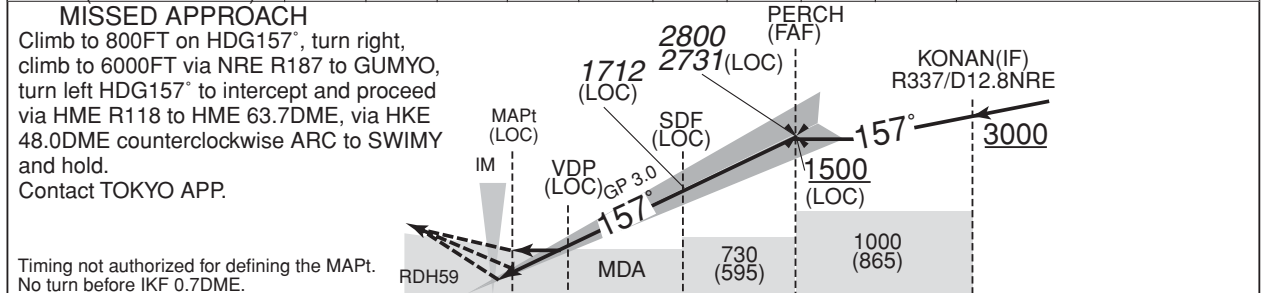

DME to IKF	0.2	0.3	0.7	1.3	5.0	8.2	13.5
NM to THR	0	0.2	0.5	1.1	4.8	8.0	13.4

MINIMA		THR elev. 130			AD elev. 135							
CAT	CAT III B		CAT III A		CAT II		CAT I		LOC		CIRCLING	
	RVR	RVR	DA(H)	RA	RVR	DA(H)	RVR/CMV	MDA(H)	RVR/CMV	MDA(H)	VIS	
A									900		1600	
B	100	175	230	101	300	330	550	510	1000	730	2400	
C			(100)			(200)		(375)		(595)		
D									1400		3200	

CHANGE : Missed APCH, APP FREQ